ROVER SYSTEMS

ROVER 21.5" COMMERCIAL LCD CCTV MONITOR, 350 CD/M², VGA, HDMI, PLASTIC CASE

ROD22A33

FEATURES

- Industrial level DID LCD panel, suitable for extensive 24/7 continuous operation;
- Resolution: 1920 x 1080;
- 5ms fast response time, no image ghosting;
- Adapt newest 3D digital filtering and 3D digital noise reduction technology;
- Picture Responsive; 178° wide viewing angle; No distortion on image display;
- High fidelity digital processing, brilliant and vivid video;
- Built-in Speaker;
- Convenient Controller and Menu;

DIMENSION

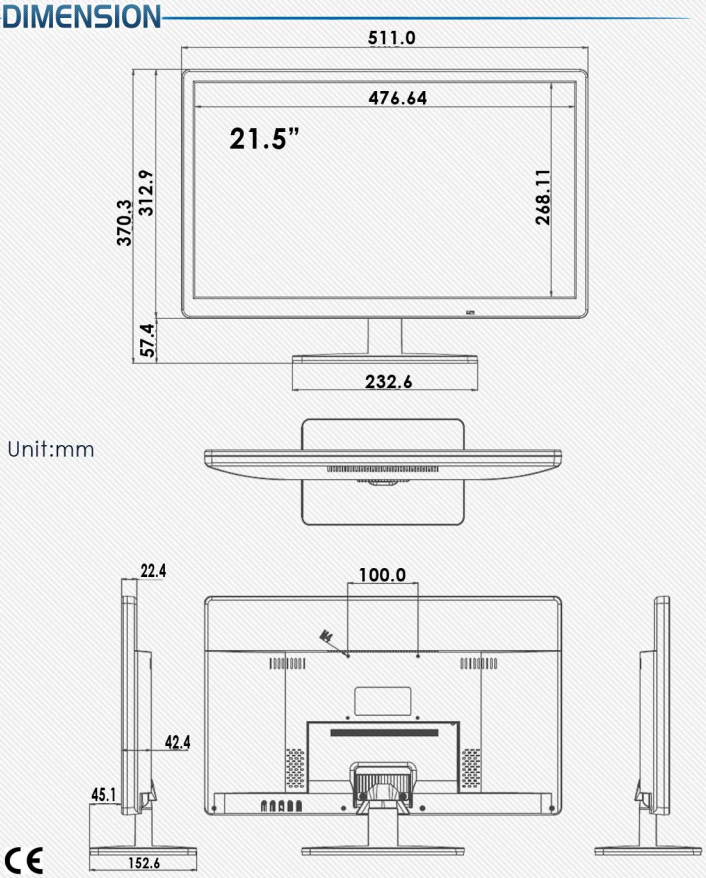

SPECIFICATIONS

MODEL	ROD22A33
MONITOR	
Screen Size	21.5"
Screen Size with Bezel	22"
Active Display Area (mm)	476.64mm(W)×268.11mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920X1080
Display Color	16.7M
Pixel Pitch (mm)	0.248(H)×0.248(V)
Brightness (nits)	350cd/㎡
Contrast Ratio	1000:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED
INPUT	
HDMI 2.0	1
VGA	1
Speaker	2X3W(Stereo)
VIDEO	
Color System	NTSC, PAL
OSD	Auto adjust, Brightness, Contrast, Horizontal / Vertical. Position, Clock,phase, Color, Language
3D Comb Filter	Supported
Video Noise Reduction	Supported
POWER & MOUNTING	
Power	DC12V~24V,60Hz
Working Temperature	-30 to +85 °C
Power Consumption	<20W
Menu	English
Mounting	Stand mount, VESA mount
MTBF	50000 Hours
Certificate Approval	CE,RoHS,CCC,FCC,ISO9000, UL
Application	Monitoring , Transportation, Controlling room, ETC
ACCESSORIES	
Included Accessories	Industrial PSU,Screw, Cable holder, Quick start guide

Disclaimer: Design & specifications subject to change without prior notice.

CE

Copyright @ 2018 Rover Systems. All rights reserved