



RG59 BC (22AWG)+95% TC BRAID
ETL


RG59/SATCBET



FEATURES

- RG59 BC
- 22 AWG + 95% TC Braid
- Wood RL/Carton
- UV Resistant

DIAGRAM

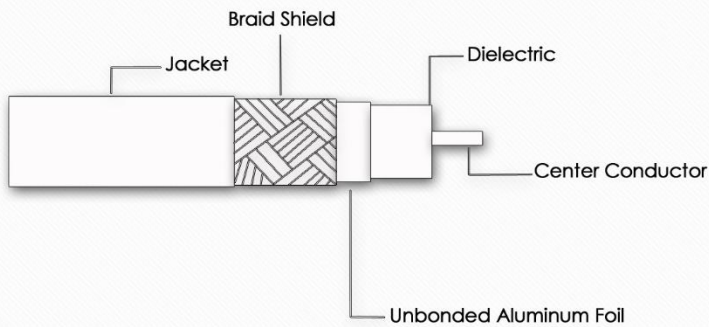

SPECIFICATIONS

MODEL	RG59/SATCBET
CONSTRUCTION PARAMETERS:	
Description	RG59 BC (22AWG)+95% TC Braid ETL, Black
Center Conductor	22AWG Solid Bare Copper
Nominal Diameter of Dielectric FOAM PE (mm)	3.66mm
Tape	Unbonded Aluminum Foil, PET Foil
Shielding	95% Tinned Copper Braid 128*0.12mm
Nominal Overall Cable Diameter (mm)	6.1mm ±0.1
Outer Jacket Material & Color	PVC Black
UV Resistant	UV Resistant
Min. Bending Radius (in)	2.4
Nominal Impedance (ohms)	75±3
Nominal Velocity of Propagation	85%
Nominal Capacitance (pF/m)	50
Quality Certification	ETL 3168327 CE,ROHS, ISO9001

* Design & specifications subject to change without prior notice.