



ROVER 1/2.8" IP STARLIGHT PTZ DOME
CAMERA, 2MP, 33X




RNZ6F9GJWT



FEATURES

- Up to 2Megapixel (1920 x 1080) resolution;
- 33X Optical zoom;
- Uses 8pcs infrared light, Up to 120m IR distance;
- Supports H.265, H.264, MJPEG;
- ONVIF Conformance;
- Supports Backlight Compensation;
- Ingress Protection Level: IP66;
- Supports auto-flip;

DIMENSIONS

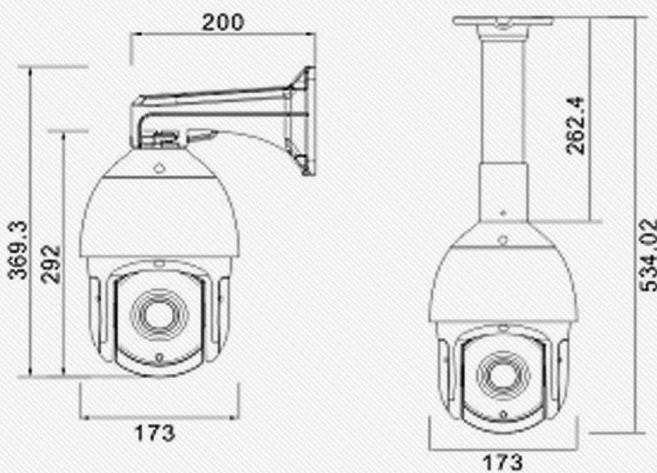

SPECIFICATIONS

MODEL	RNZ6F9GJWT
CAMERA	
Image Sensor	1/2.8" 2MP Progressive Scan CMOS
Frame Rate	60Hz: 30 frame (1920x1080,1280x720)
Video Compression	H.265/ H.264/ MJPEG
Min. illumination	Color:0.05Lux, black-white:0.005Lux,
White Balance	Automatic/ Manual/ Indoor/ Outdoor
Gain Control	Auto/Manual
S/N	> 50dB
DWDR	Support
Electronic Shutter	1/2 ~1/20,000s, support slow shutter
Day-Night Mode	IR cut filter with auto switch
Iris	F1.6~F2.8
Focus Mode	Auto/Manual
Focus Lens	4.6~166mm, 33x Optical zoom
Mini Focus Distance	100mm~1000mm(Wide-Tele)
Pan Angle	68.5°~4.2 °(Wide-Tele)
Close Range	10~1000mm(Wide-Tele)
IR Distance	120M
IR Angle	Three angle adjustable with zoom in / out
Pan Speed	0.6°~220°/S
Tilt Speed	auto flip, 0.8°~75°/S
Tilt Range	0°~90°, auto flip 180°
Proportional Zoom	Support
Preset	254
Patrol	4, each patrol can add 32 preset
A.B preset Scan	Support
Park Function	Support (Preset, Pattern, AB scan, Pan-auto running)
Network Protocol	IPv4/IPv6,HTTP,HTTPS,802.1x,Qos,FTP,SMTP,UPnP,SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP/IP, DHCP, PPPoE
Network Interface	1 RJ45 10M/100M IP DATA
Browser	Support IE7, IE8, IE9, Chrome8+, Firefox3.5+, Safari5+
PTZ Control Protocol	Pelco D, Pelco P, HIKVISION, Dahua
Power Consumption	DC 12V4A, 10W (Max) at day time, 30W(Max) at night time
Working Temperature & Humidity	-20°C~+60°C, ≤90%RH(no-frostless)
Protection Grade	Lightning, Surge and Voltage transient protection; IP66
Package Size(mm)	290mm × 290mm × 460mm

Disclaimer: Design & specifications are subject to change without prior notice.