



ROVER 32CH H.265+ NVR (8 SATA,  
2 HDMI & VGA VIDEO OUTPUT, AUDIO  
IN/OUT; ALARM IN/OUT, 220VAC)


**RNH1232KQE**



## FEATURES

- 32Ch video input;
- 1 VGA output, 2 HDMI output, HDMI1 support 4K output, VGA and HDMI1 simultaneous output and HDMI2 independent output;
- 2U Case, 8SATA(Up to 8TB for each SATA);
- H.265+/H.265/H.264 Video Compression;
- 2\*10/100/1000Mbps auto-sensing Ethernetport, RJ45 port;
- Dual Gigabit network ports, support load balancing, network fault tolerance, and multiple network mode settings for different network segments access;
- Supports ONVIF protocol;
- Cloud services and alarm information push to phone;
- Supports remote access, support ARSP;
- Supports DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, 4G, WIFI;
- Mobile phone remote monitoring (iOS, Android);
- Multi browser access (IE, Chrome);
- Perfect protection circuit, unique triple watchdog function;
- Supports WEB, CMS, VMS Platform;

## INTERFACE

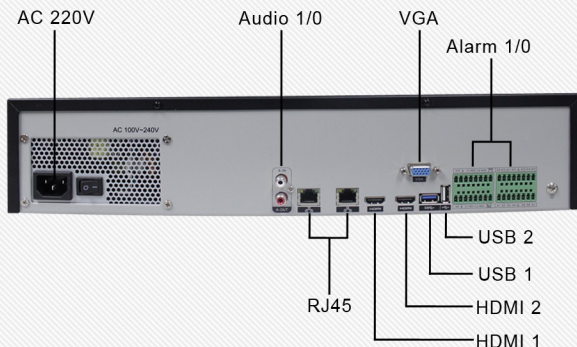

## SPECIFICATIONS

MODEL		RNH1232KQE	
<b>VIDEO</b>			
Video Input (Encode)	16Ch 4K	32Ch 5M	16Ch 1080P
Playback (Decode)	4Ch 4K	4Ch 5M	16Ch 1080P
Video Compression	H.265+/H.265/H.264		
<b>AUDIO</b>			
Audio Compression	G.711a		
Intercom	Supported		
<b>MANAGEMENT</b>			
Record Mode	Manual/Alarm/Motion Detection/Timing		
Search Mode	Search by Time/Calendar/Event/Channel		
Storage Mode	HDD Storage		
Backup	Network, USB		
<b>INTERFACE</b>			
HDMI Output	2*HDMI (MAX:4K)		
VGA Output	1*VGA (MAX:1080P)		
Ethernet Port	2*RJ45 10/100/1000Mbps Ethernet port		
Audio I/O	1/1		
Alarm I/O	16/4		
USB Port	2*USB 2.0 ports, 1*USB 3.0 ports		
HDD	8*SATA interface (Up to 8TB for each SATA)		
<b>GENERAL</b>			
Temperature	0°C - + 55°C		
Humidity	10% -90% RH		
Power Supply	220VAC		
Consumption	<10W (Without HDD)		
Weight	Around 6.0KG		
Dimension	443mm(L) X 427.5mm(W) X 92mm(H)		

Disclaimer: Design & specifications subject to change without prior notice.