



ROVER 1/2.9" MINI IP PTZ DOME
CAMERA, 2.0MP


RNP6J2GBP



FEATURES

- Up to 2 Megapixel (1920 x 1080) resolution;
- Day / Night functionality, Up to 15m IR distance;
- Supports H.265, H.264, MJPEG;
- ONVIF conformance;
- Supports PoE power supply;
- Supports lightning and surge protection;
- Ingress Protection Level: IP66;
- Supports auto-flip;

DIMENSION

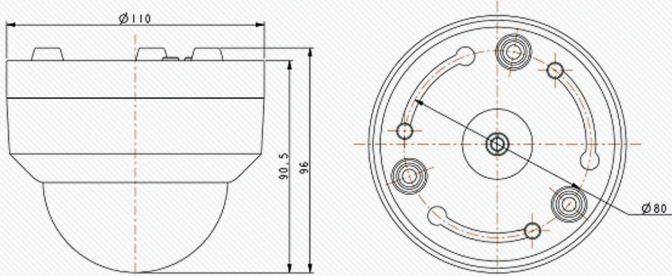

SPECIFICATIONS

| MODEL | RNP6J2GBP |
|----------------------|---|
| CAMERA | |
| Image Sensor | 1/2.9", 2MP, Progressive Scan, CMOS |
| Minimum illumination | Color: 0.1 Lux@F1.2, 0 Lux with IR |
| Electronic Shutter | Auto/Manual (1/5 ~ 1/20000s) |
| Day-night Mode | IR-cut filter with auto switch (ICR) |
| Optical Zoom | 3.5mm ~ 10.5mm; 3x |
| Angle of View (H) | 106.6° ~ 51.8° |
| IR Distance | 15m |
| Pan Range | 0° ~ 355° |
| Pan Speed | 0° ~ 25°/s |
| Tilt Range | 0° ~ 90° |
| Tilt Speed | 0° ~ 20°/s |
| Proportional Zoom | Adjust rotation speed automatically according to zoom multiples |
| Preset | 16 |
| Park Function | Preset scan can invoke automatically after a defined time of inactivity |
| Max Image Size | 1920x1080 |
| Output Bit Rate | 32Kbps ~ 16Mbps |
| Video Compression | H.265/ H.264/ MJPEG |
| Network Protocol | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, UPnP |
| Network Interface | 1RJ45 10M/100M Base - TX Ethernet |
| Browser | Support IE7, IE8, IE9, Chrome 8+, Firefox 3.5+, Safari 5+ |
| Power Consumption | DC 12V2A, 10W(max) PoE (IEEE802.3af) |
| Working Temperature | -20°C ~ +60°C |
| Working Humidity | ≤90%RH (non-condensing) |
| Protection Grade | TVS3000V lightning protection, surge protection and voltage transient protection, weather proof (for outdoor): IP66 |

Disclaimer: Design & specifications are subject to change without prior notice.