



EHTP1X010P5 (5MP)



EHTP1X010P4 (4MP)

ENDURA ANALOG HD TWISTED PASSIVE VIDEO TRANSCIVER SINGLE CHANNEL (5MP/ 4MP / 1080P / 720P, UTP CAT5 /5E/6, PUSH TERMINAL WITH PIGTAIL)



EHTP1X010P4 EHTP1X010P5



FEATURES

- No Power Required;
- No tools needed, connect through push terminal;
- Compatible with AHD/TVI/CVI;
- Plug & Play, Real Time Transmit CCTV HD Video Signal;
- Anti-interference, ESD;
- ABS outer shell, convenient to use in intensive project;

TYPICAL APPLICATION

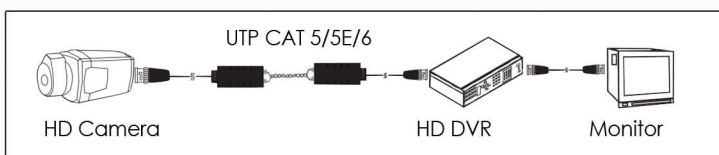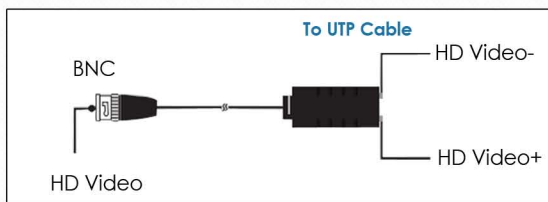

SPECIFICATIONS

MODEL	EHTP1X010P4	EHTP1X010P5
PROPERTIES		
Transmission Signal	1 Channel	
Transmission Distance	AHD 720P: 350m/1080P: 200m/4MP: 200m/5MP: 200m HDCVI 720P: 400m /1080P: 250m / 4MP: 200m; HDTV 720P/1080P: 250m/ 4MP: 200m;	
Category Type	UTP CAT5 / 5E / 6	
VIDEO TRANSMISSION PROPERTIES AND PORT		
Coaxial Video Connector	BNC-M	
Twisted-Pair Video Connector	Push-Terminal	
Compatible Format	AHD/HDCVI/HDTV	
Resolution	720P/1080P/3MP/4MP/5MP	
Anti-interference	>60dB	
PROTECTION		
ESD	1a contract discharge electricity level 3	
	1b air contract discharge electricity level 3	
	Per: IEC61000-4-2	
Coaxial Cable Connector	2KV (common-code) Per: IEC61000-4-5	
UTP Cable Connector	2KV(common-code), 4KV(common-code), Per: IEC61000-4-5	
IMPEDANCE		
BNC Male	75 ohms	
UTP Cable	100 ohms	
PHYSICAL PROPERTIES		
Dimension (L*W*H)	36.5mm*17.5mm*17.3mm	
Shell	ABS	
Color	Black	
N.W.	21G	
STABILITY		
MTBF	>10000H	
ENVIRONMENTAL		
Operating Temperature	-10-55°C	
Storage Temperature	-20-70°C	
Humidity	0-95% (non-condensing)	

Disclaimer: Design & specifications subject to change without prior notice.
Note: Specifications guaranteed using AHD video format. CVI and TVI performance may varies depends on DVR model and Brand.