




This device is a single channel passive video transceiver, which is connected by CAT5E/6 UTP cable to transmit color video in real-time. In spite of its long-distance transmission, it has a strong anti-interference feature. It has many applications in security, education, industrial factories, and other complex environments.

FEATURES

- No power is required. Simplified project wiring;
- Plug & Play, real-time transmission of clear and stable CCTV video signal;
- Transmission Distance: Up to 300m with passive transceiver;
- Supports anti-interference, lightning protection, anti-static;
- ABS outer shell; compact and convenient to use in outdoor projects;
- Transmission distance varies depending on type and material of cable used;

SYSTEM DIAGRAM

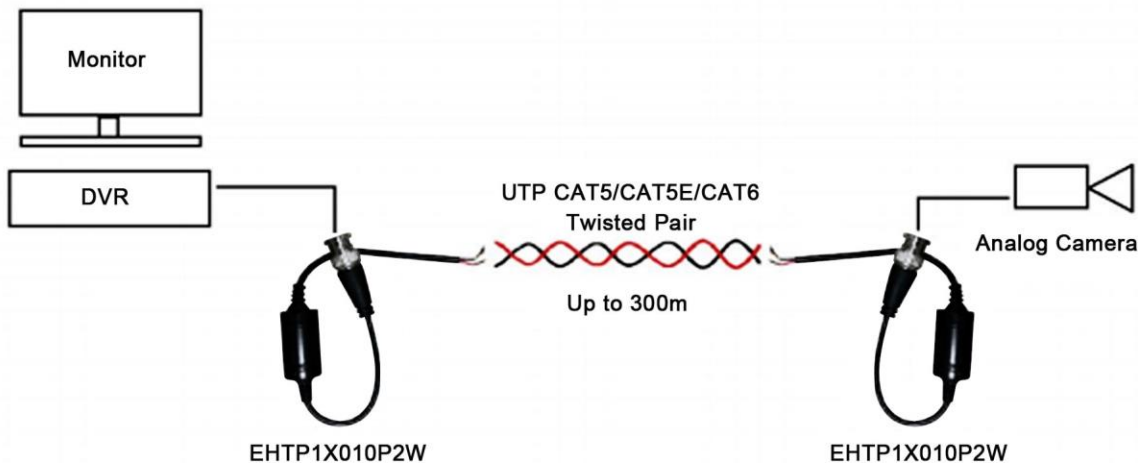

ENDURA ANALOG HD TWISTED PASSIVE VIDEO TRANSCIVER SINGLE CHANNEL WEATHERPROOF (1080P/720P, UTP CAT5/5E/6, PIGTAIL)

EHTP1X010P2W



SPECIFICATIONS

MODEL	EHTP1X010P2W
PROPERTIES	
Transmission Signal	1 channel
Transmission Distance	300m
Coaxial Video Connector	BNC-M
Compatible Format	NTSC,AHD/CVI/TVI
Signal Transmission Band	0-6MHz(-3dB)
Anti-interference	>60dB
Coaxial Video Interface Protection	4KV(common-mode)Per:IEC61000-4-5
Twisted-pair Video Transmission Interface Protection	2KV(different-mode) 1a contact discharge electricity level 3 1b air discharge electricity level 3
Per	IEC61000-4-2
MTBF	>10000H
Shell	ABS
Operating Temperature	-10-55°C
Storage Temperature	-20-70°C
Humidity	0-95% (non-condensing)

Disclaimer: Design & specifications are subject to change without prior notice.