





ROVER SMART PAN TILT CAMERA 3.0MP 3.6MM, H.265X (LAN, DC 5V/2A, AI HUMAN DETECTION)

# **RHOD2D2H1**












### -FEATURES

- Up to 3.0MP HD Resolution (2288 x 1296);
- H.265X encoding technology smaller file size results in extended recording period;
- Supports Human Detection;
- Supports Auto tracking;
- Supports Micro SD Card up to 128GB;
- Two-way voice intercom, push human detection alarm information;
- Push Alarm message via WeChat;
- Real-time save and playback via CMS PC client;
- Standard mic and speaker;
- Horizontal rotation: 355 degrees and Vertical: 90 degrees;
- Standard 8PCS LED dot matrix lights, infrared black and white night vision function;
- Industrial design;

## ■ Supports Day/Night Auto ICR;

- Supports ONVIF Protocol for NVR recording;

### INTERFACE

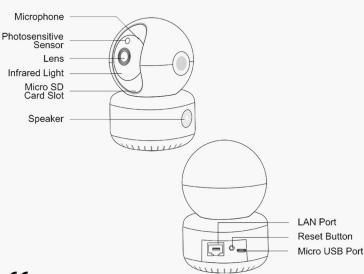

### **SPECIFICATIONS**

| MODEL                       | RHOD2D2H1   |
|-----------------------------|---|
| PARAMETERS                  |   |
| Sensor                      | 3.0MP 1/2.7" high-performance CMOS sensor   |
| Minimum Illumination        | Color 0.001Lux@F1.2, black and white 0.0001Lux@F1.2                                       |
| Shutter                     | 1/50 (1/60) seconds to 1/10000 seconds  |
| Lens Size                   | F2.0  |
| Lens Mount                  | M2  |
| Angle of View               | Horizontal rotation: 355°, Vertical: 95°  |
| Night light pattern         | Infrared black and white night vision   |
| IR Range                    | 10 meters   |
| ENCODING FORMAT             |   |
| Video Compression Format    | H.265X  |
| Video Compression code rate | Super HD, label second gear, rate adaptive  |
| IMAGE                       |   |
| Video Profile               | Main Resolution: 2288*1296; Sub-Resolution: 840*448                                       |
| FEATURES                    |   |
| Alarm Mode                  | Siren warning, mobile APP alarm push,<br>humanoid detection alarm/mix line/area detection |
| Network Protocol            | ONVIF protocol Supports extended network protocols  |
|                             | such as RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP   |
| Smart Feature               | Auto Tracking/Human Detect  |
| INTERFACE                   |   |
| Ethernet Port               | 1 RJ45 10M/100M adaptive Ethernet port  |
| Storage                     | Micro SD card (MAX 128GB)   |
| GENERAL                     |   |
| Power Supply                | DC 5V/2A  |
| Power Consumption           | 3W Max  |
| Operating Temperature       | Zero 10 ° C -60 ° C   |
| Humidity                    | less than 90% [no condensation]   |
| Dimensions                  | 74mm x 74mm x 115mm   |
| Weight                      | Net weight: 188g Gross weight: 312.8g<br>(Note: actual product)                           |

Disclaimer: Design & specifications are subject to change without prior notice.