



3.0MP (2304*1296) 1/2.9" DUAL LIGHT BULLET WIFI IP CAMERA, 2.8MM, 2 LED ARRAY, 2 SPOTLIGHT (30-M IR RANGE, BUILT-IN MICROPHONE AND SPEAKER, WHITE, 12VDC, NTSC)



RHVD2D3X2D




RHVD2D3X2D is a WiFi waterproof bullet network camera, suitable for places with low or no light conditions and needs high-definition image quality, such as roads, warehouses, underground parking lots, pipelines, parks, etc.

FEATURES

- 3.0MP Resolution (2304 x 1296);
- 1/2.9" Low Illumination CMOS Sensor;
- HD Lens: 2.8mm;
- H.265AI Video Compression;
- Supports Human Detection;
- Supports Face Detection;
- Supports Multi-Platform;
- Supports ONVIF Protocol;
- Ingress Protection: IP66;
- Automatic Electronic Shutter;
- Automatic ICR;
- Mobile Phone Monitoring;
- Voice Intercom;
- Dual Light Alert;

INTERFACE

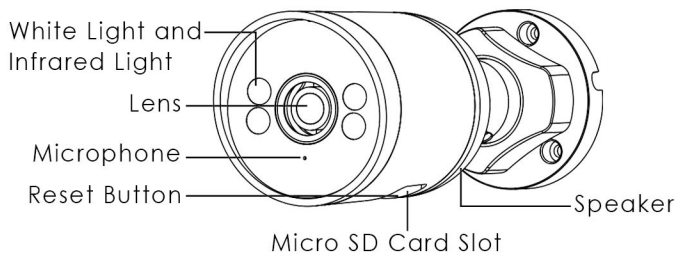

SPECIFICATIONS

MODEL	RHVD2D3X2D
CAMERA	
Image Sensor	1/2.9" Low Illumination CMOS Sensor
Illumination	Color: 0.01 Lux @ (F1.2,AGC ON); 0 Lux with IR B/W: 0.001 Lux @ (F1.2,AGC ON); 0 Lux with IR
Shutter Speed	1/50(1/60)s to 1/10,000 s
Lens Size	HD Lens 2.8mm
Lens Mount	M12
Day & Night	IR Cut Filter with Auto Switching
IMAGE	
Maximum Resolution	2304*1296
Frame Rate	2304*1296@20fps, 1920*1080@20fps
Setting	Saturation, Brightness and Contrast (adjustable through IE browser or client software.)
COMPRESSION	
Video Compression	H.265AI Compatible (H.265/H.264) High Profile, JPEG Snapshot
Bit Rate	0.1Mbps~8Mbps
Audio Compression	G.711a
NETWORK	
Storage	Network Storage
Alarm	Face Detection, Human Detection, Motion Detection, Video Loss, Video Block, etc.
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, PPPoE, SMTP, NTP, (HTTPS, SIP, 802.1x, IPv6 option
Features	Anti-Flicker, Dual-Stream, Heartbeat, Password Protection
INTERFACE	
Ethernet	1*10/100Mbps RJ45 Ethernet Port
Wireless	1*WiFi
Audio I/O	1*In/1*Out (Built-in Mic + Speaker)
SD Card	Support
GENERAL	
Temperature	-10°C~+60°C
Humidity	10%-90% RH
Power Supply	DC12V±10%/PoE
IR Range	4*(White Light+Infrared Light), "IR2":20-30 meters
Power Consumption	Max. 3W
Material	ABS+ PC Plastic
Ingress Protection	IP66
Weight	Around 300g
Dimensions	Φ63.37mm*157.2mm

Disclaimer: Design & specifications are subject to change without prior notice.