



1/2.8" DUAL LIGHT BULLET DARK LIGHT IP CAMERA, 4MM, 4 SPOTLIGHT (30 METERS IR RANGE, BUILT-IN MIC AND SPEAKER, WHITE, POE/12VDC, NTSC)

RNB813GLMD
RNBB13GLMD




RNB813GLMD and RNBB13GLMD are AI Dark Light PoE waterproof bullet network cameras, suitable for places with low or no light conditions which requires high definition image quality, such as roads, warehouses, underground parking lots, bars, pipelines, parks, etc.

FEATURES

- HD Lens: 4mm;
- Day/Night (Auto ICR);
- Auto Electronic Shutter Time;
- IR Range: 4* White Light, "IR2":20-30 meters;
- Ingress Protection Level: IP67;
- H.265AI (compatible H.265/H.264) high profile;
- Mobile Phone Remote Monitoring (iOS, Android);
- Supports ONVIF Protocol;
- Supports PoE;
- Supports Voice Intercoms;
- Supports Double Light Alert;
- Built-in Mic and Speaker;
- Supports AI functions i.e. Human detection, Face detection and Vehicle detection;

DIMENSIONS

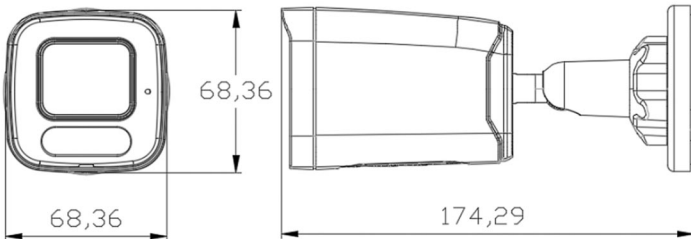

SPECIFICATIONS

MODEL	RNB813GLMD	RNBB13GLMD
CAMERA		
Image Sensor	1/2.8" Dark light CMOS sensor	1/1.8" Dark light CMOS sensor
Minimum Illumination	Color: 0.0001Lux @(F1.2, AGC ON); 0 Lux with IR B/W: 0.0001 Lux @ (F1.2, AGC ON); 0 Lux with IR	
Shutter Time	1/50(1/60)s to 1/10,000s	
Lens	HD Lens: 4mm	
Lens Mount	M16	
Day & Night Mode	IR Cut Filter with Auto Switch	
IMAGE		
Resolution	2560*1440 (4.0MP)	3840*2160 (8.0MP)
Frame Rate	4MP 2560*1440@25fps, 3MP 2304*1296@25fps, 2MP 1920*1080@25fps	8MP 3840*2160@20fps; 5MP 2880*1616@25fps; 4MP 2560*1440@25fps; 2MP 1920*1080@25fps;
Image Settings	Saturation, Brightness and Contrast (adjustable through IE browser or client software)	
COMPRESSION		
Video Compression	H.265AI (compatible H.265/H.264) High Profile, JPEG Snapshot	
Bit Rate	0.1Mbps~8Mbps	
NETWORK		
Storage	Network Storage	
Alarm	Face Detection, Human Detection, Vehicle Shape Detection, Motion Detection, Video Loss, Video Block, etc	
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, PPPoE, SMTP, NTP, (HTTPS, SIP, 802.1x, IPv6 option)	
Features	Anti-Flicker, Dual-Stream, Heartbeat, Password Protection	
INTERFACE		
Ethernet	1*10/100Mbps Ethernet port, RJ45 port	
Audio I/O	1/1 (Built-in Mic/Speaker)	
GENERAL		
Temperature	-10°C~+60°C	
Humidity	10%~90% RH	
Power Supply	DC12V±10%/PoE	
IR Range	4* White Light, "IR2":20-30 meters	
Power Consumption	MAX 4W	
Material	Metal	
Ingress Protection	IP67	
Weight	Around 360g	
Dimensions	68.36mm*68.36mm *174.29mm	

Disclaimer: Design & specifications are subject to change without prior notice.