



ROVER DUAL LIGHT IP BULLET CAMERA,  
1 SPOTLIGHT, 1 LED ARRAY, (30 METERS  
IR RANGE, 12VDC, NTSC)


**RNB513GLKDD**  
**RNB713GLKD**  
**RNB913GLKD**



## FEATURES

- HD Lens: 2.8mm(RNB513GLKDD, RNB713GLKD)/3.6mm(RNB913GLKD);
- Day/Night(Auto ICR);
- Auto Electronic Shutter Speed;
- 1 LED Array White Light and 1 LED Array Infrared Light (20 - 30 meters);
- Ingress Protection Level: IP66;
- Supports DWDR, 3D DNR;
- H.265A/H.265+(Compatible H.265/H.264) High Profile;
- Mobile Phone Remote Monitoring (iOS, Android);
- Multi Browser Access (IE, Chrome, Firefox, Safari);
- Remote Viewing Protocol (ID, IP, DDNS, etc.);
- Supports WEB, CMS, VMS, Cloud Services;
- Supports HVR/NVR, ONVIF Protocol;
- Supports AI Functions Face Detection and Human Detect;
- Supports PoE Power Supply;

## DIMENSIONS

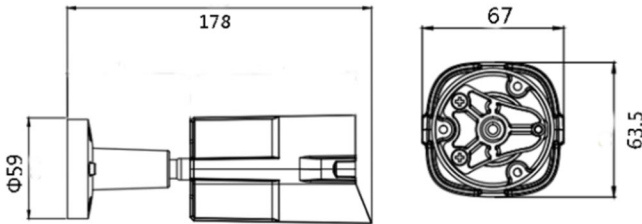

## SPECIFICATIONS

MODEL	RNB913GLKD	RNB713GLKD	RNB513GLKDD
<b>CAMERA</b>			
Camera Sensor	1/2.8" Black Light CMOS Sensor	1/2.8" Progressive Scan CMOS	1/2.9" Black Light CMOS Sensor
Minimum Illumination	Color:0.0001Lux @ (F1.2,AGC ON); 0 Lux with IR B/W: 0.0001 Lux @ (F1.2,AGC ON), 0 Lux with IR	Color:0.01Lux @ (F1.2,AGC ON); 0 Lux with IR B/W: 0.001 Lux @ (F1.2,AGC ON), 0 Lux with IR	Color:0.0001Lux @ (F1.2,AGC ON); 0 Lux with IR B/W: 0.0001 Lux @ (F1.2,AGC ON), 0 Lux with IR
Shutter Speed	1/50(1/60)s to 1/10,000 s		
Lens	3.6mm	2.8mm	2.8mm
Lens Mount	M12		
Day and Night Mode	IR Cut Filter with Auto Switch		
<b>IMAGE</b>			
Maximum Image	2592*1944 (5.0MP)	2304*1296 (3.0MP)	1920*1080 (2.0MP)
Frame Rate	NTSC: 5M@15fps 4M@20fps 2M@25fps	NTSC: 3M@20fps/ 1080P@25fps	NTSC: 1080P@25fps
Image Settings	Saturation, Brightness and Contrast		
<b>COMPRESSION</b>			
Video Compression	H.265A/H.265+(Compatible H.265/H.264) High Profile, JPEG Snapshot		
Video Bit Rate	0.1Mbps-8Mbps		
Audio	G.711a		
<b>NETWORK</b>			
Storage	Network Storage		
Alarm Events	Face Detection(Support 1080P),Human Detect, Motion Detection, Video Loss, Video Block		
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, PPPoE, SMTP, NTP, (HTTPS, SIP, 802.1x, IPv6 option)		
Features	Anti-Flicker, Dual-Stream, Heartbeat, Password Protection		
<b>INTERFACE</b>			
Ethernet	1*10/100Mbps Ethernet port, RJ45 port		
<b>GENERAL</b>			
Temperature	-10°C-+60°C		
Humidity	10%-90% RH		
Power Supply	DC12V±10%/PoE		
IR Range	1*White Light 1*Infrared Light "IR2":20-30m		
Power Consumption	MAX 3W		
Material	ABS Plastic+Metal		
Ingress Protection	IP66		
Weight	Around 400g		
Dimensions	178mm*67mm*63.5mm		

Disclaimer: Design & specifications are subject to change without prior notice.