




ROVER 32" COMMERCIAL LED CCTV
MONITOR, 350 CD/M², BNC, VGA,
HDMI, FRAMELESS PLASTIC CASE
ROD32E33EF



FEATURES

- Industrial level DID LCD panel, suitable for 24x7 operation;
- 1920 x 1080 resolution;
- 5ms fast response time, no image ghosting;
- Adapts newest 3D digital filtering and 3D digital noise reduction technology;
- Picture fast response; 178° wide viewing angle; image display is not deformed;
- High fidelity digital processing, brilliant and vivid video;
- Built-in speaker;

DIMENSIONS

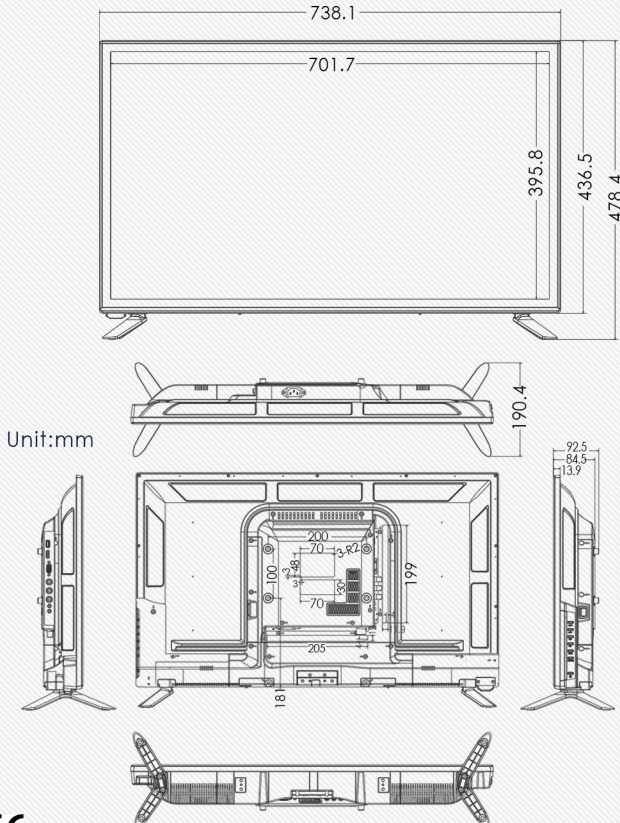

SPECIFICATIONS

MODEL	ROD32E33EF
MONITOR	
Screen Size	32"
Active Display Area (mm)	697.6845mm(W)×392.256mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920x1080
Display Color	1.073G
Pixel Pitch (mm)	0.294(H)×0.294(V)
Brightness (nits)	350cd/m ²
Contrast Ratio	1000:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED
INPUT & OUTPUT	
HDMI 2.0	1
VGA	1
BNC Input	2
BNC Output	1
Speaker	2X3W(Stereo)
VIDEO	
Color System	NTSC
OSD Control	Auto Adjust, Brightness, Contrast, Horizontal /Vertical Position, Clock, Phase, Color, Language
3D Comb Filter	Supported
Video Noise Reduction	Supported
POWER & MOUNTING	
Power Supply	AC100V~240V, 50/60Hz
Working Temperature	-30 °C to +85 °C
Power Consumption	<35W
Menu	English
Mounting	Stand Mount, VESA Mount
MTBF	50,000 Hours

Disclaimer: Design & specifications subject to change without prior notice.