



9-PORT 10/100M SWITCH WITH 4 POE PORTS


S30-08E1CF




FEATURES

- Can supply power to network surveillance cameras with PoE function
- 9x 10/100Mbps auto-sensing RJ45 ports, 4x 10/100Mbps PoE ports, 1x uplink port
- Supports port auto-flip (Auto MDI/ MDIX)
- External power supply
- Maximum PoE ports power: 65W (Port 1 to Port4)
- Maximum power of single PoE port: 15.4W
- Adopts store-and-forward architecture
- IEEE 802.3af power on up to 4 ports
- Features with fanless, natural cooling, small, compact and quiet design, suitable for desktop or wall

DIMENSION

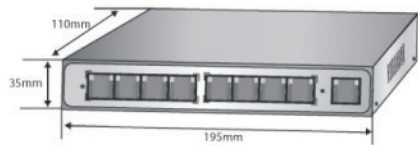

DIAGRAM

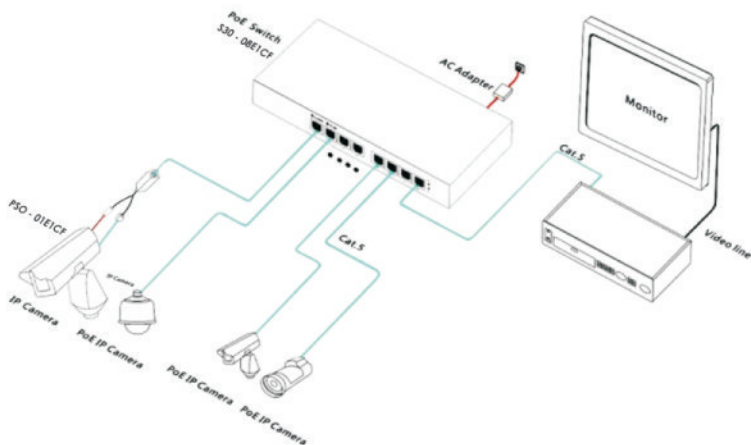

SPECIFICATION

MODEL	S30-08E1CF
Connector	9x 10/100M copper cable RJ45 ports(all ports support MDI/MDIX) 4x PoE ports, 1x uplink port
Transfer Mode	Store-And-Forward
Network Medium	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or more UTP (≤100 meter) Data transmission distance: 100m
Performance	Bandwidth: 1.6Gbps (non-blocking)
Specifications	Network Latency (100 to 100M bps): maximum delay less than 20 microseconds Packet Buffer Memory: 96KB Address Database Size: 1,000 MTBF: 190,000 hours (about 21 years)
Network Protocols and Standards	IEEE 802.3i 10BASET IEEE 802.3u 100BASETX IEEE 802.3x Flow Control IEEE 802.1af DTE Power via MDI IEEE 802.3af
LEDs Status	System: power supply Every Port: connecting, PoE working status
Power	Maximum PoE power: 65W PoE port power:15.4 W(1~4 port) Power input: AC100-240V 50/60Hz;
Dimensions	195mm x 110mm x 35mm
Weight	0.477kg
Working Environment	Operating Temperature: 0 ° ~ 55 ° C Storage Temperature: -20 ° ~ 75 ° C Operating Humidity: 10% ~ 95%, non-condensing
Radiation	CE mark, commercial FCC Part 15 Class B VCCI Class B EN 55022 (CISPR 22), Class B
Safety	CE Mark ,commercial CE/LVD EN60950, RoHS

* Design & specifications subject to change without prior notice